

1/11

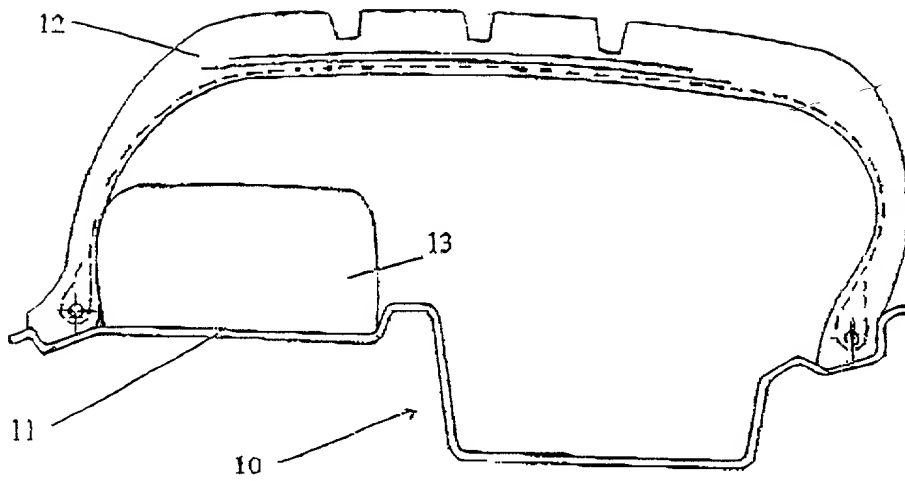


Fig. 1

2/11

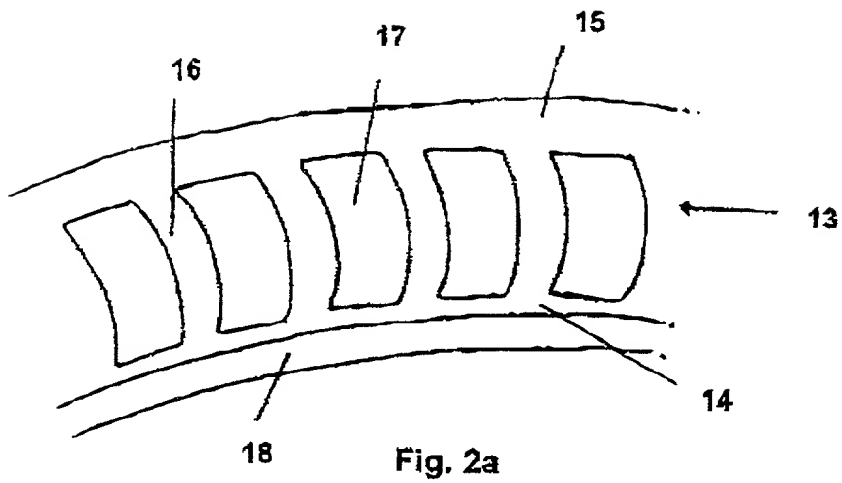


Fig. 2a

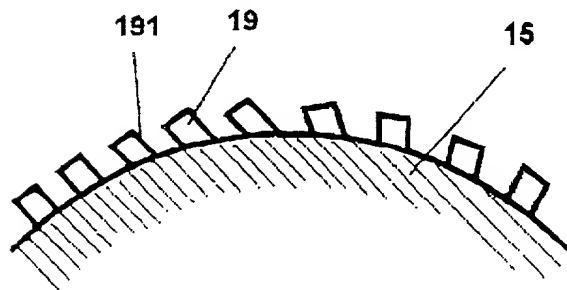


Fig. 2b

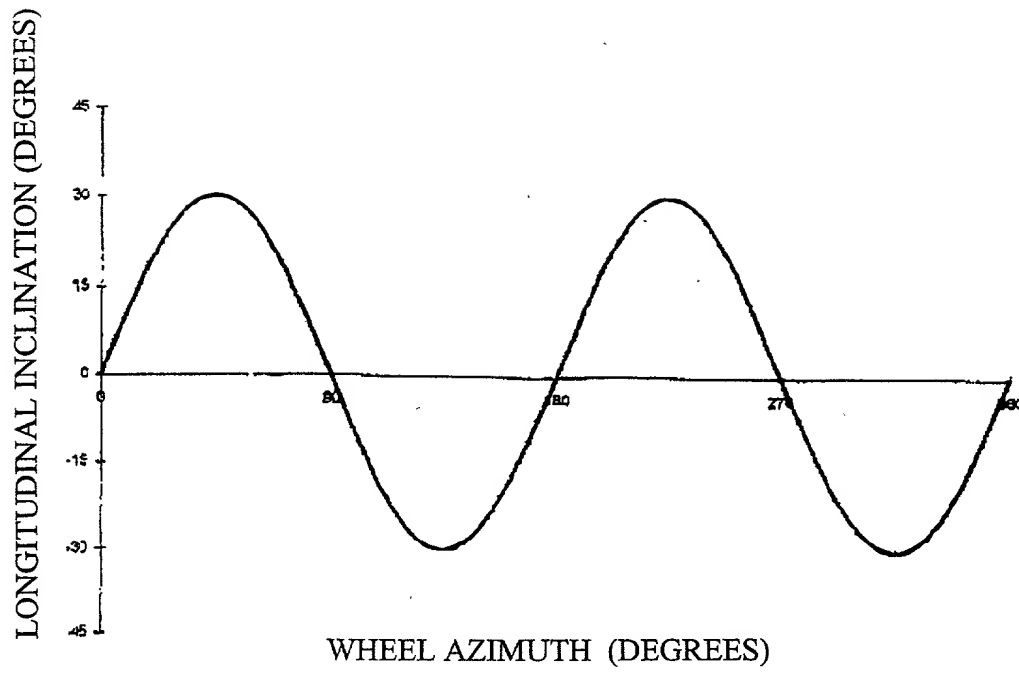


Fig. 3

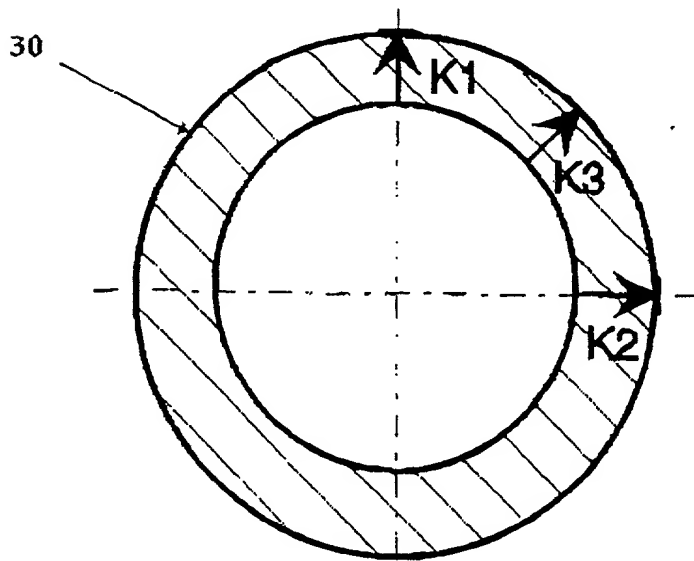


Fig. 5

4/11

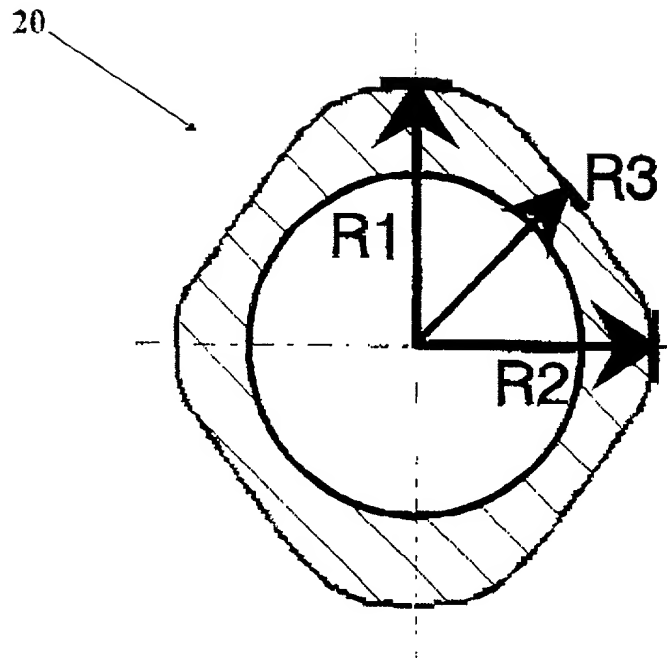


Fig. 4

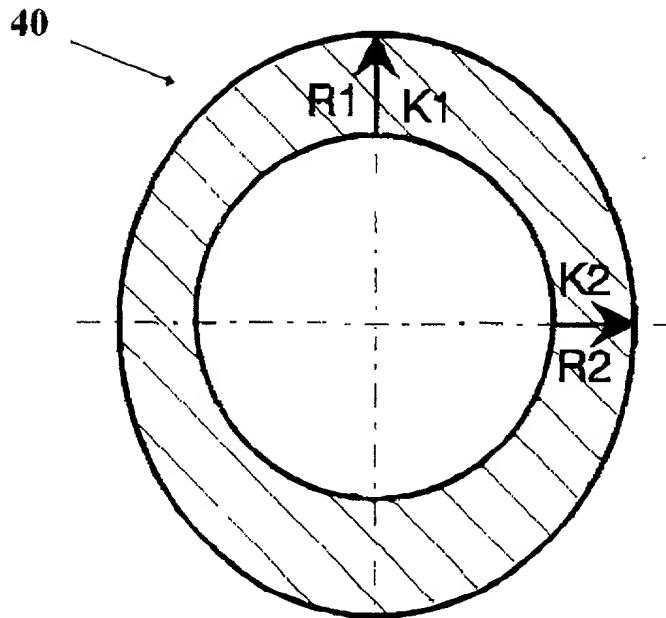


Fig. 6

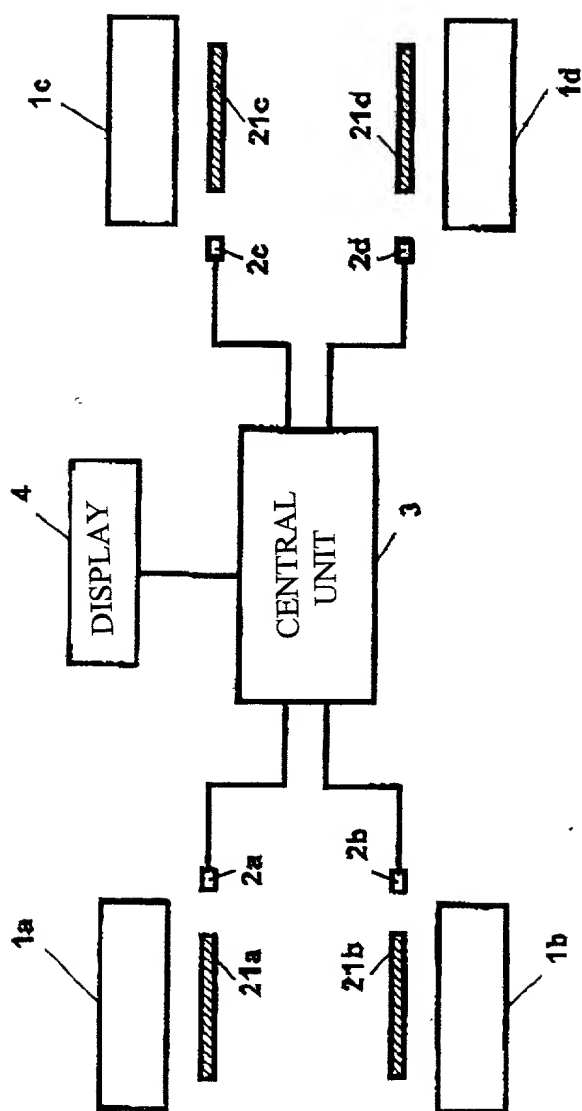


Fig. 7

6/11

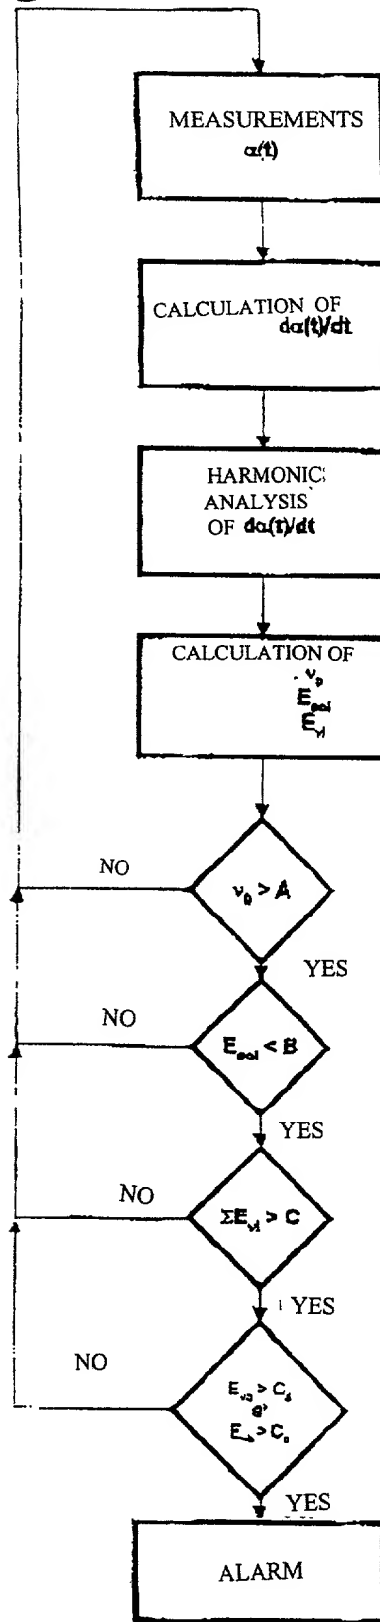


Fig. 8

7/11

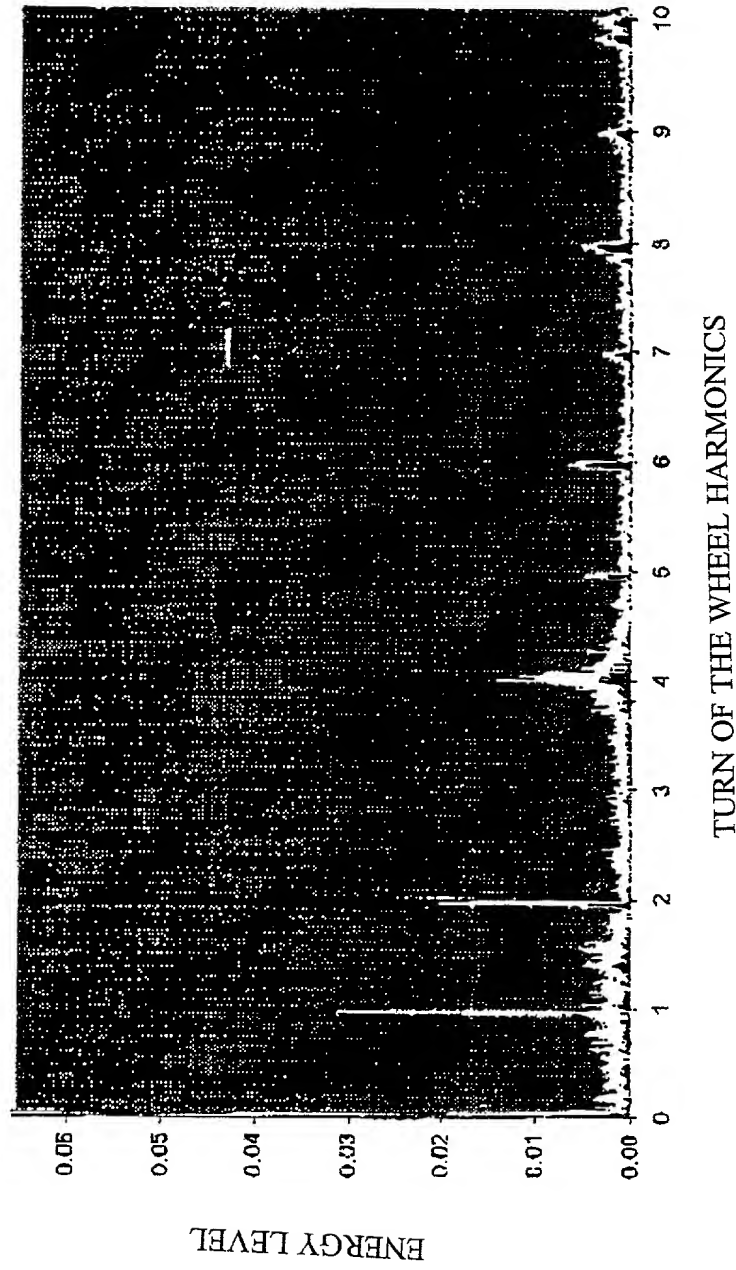


Fig. 9

8/11


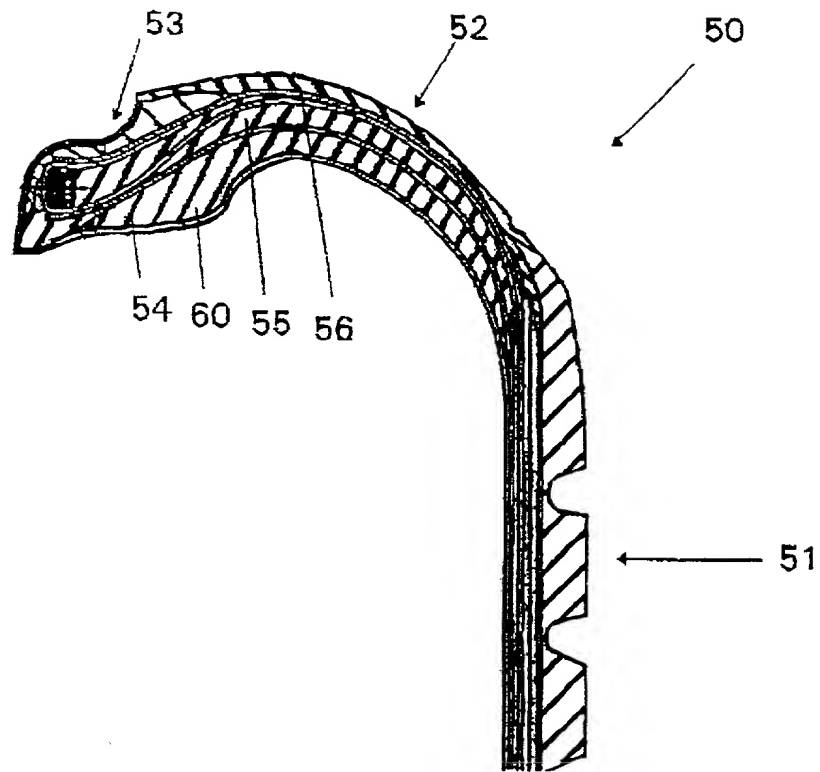


Fig. 10

9/11

HEIGHT OF REINFORCEMENT IN SIDEWALL (mm)

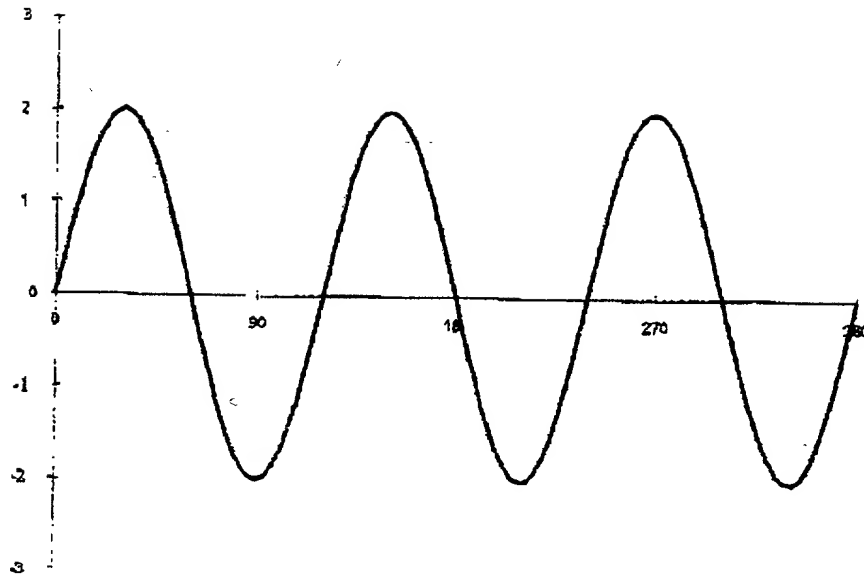

WHEEL AZIMUTH (DEGREES)

Fig. 11

10/11

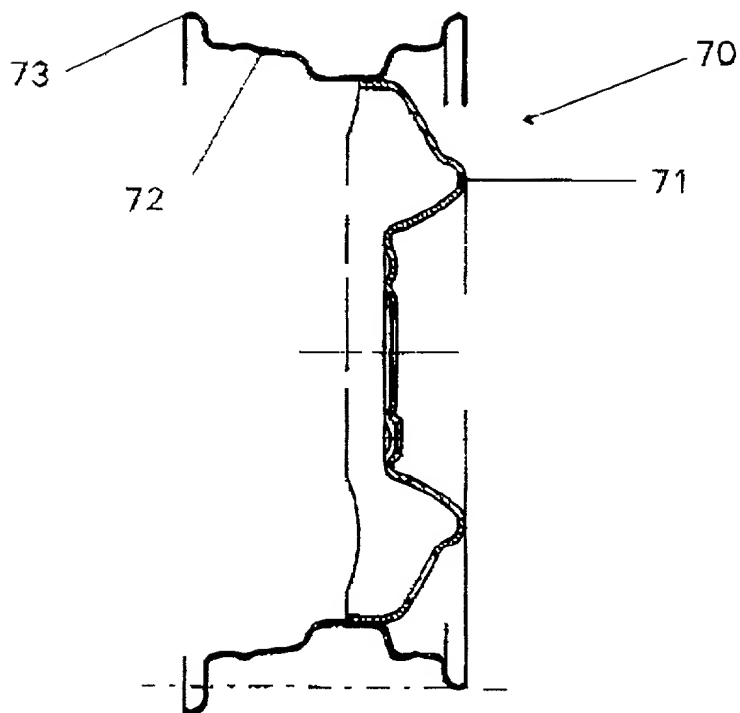


Fig. 12

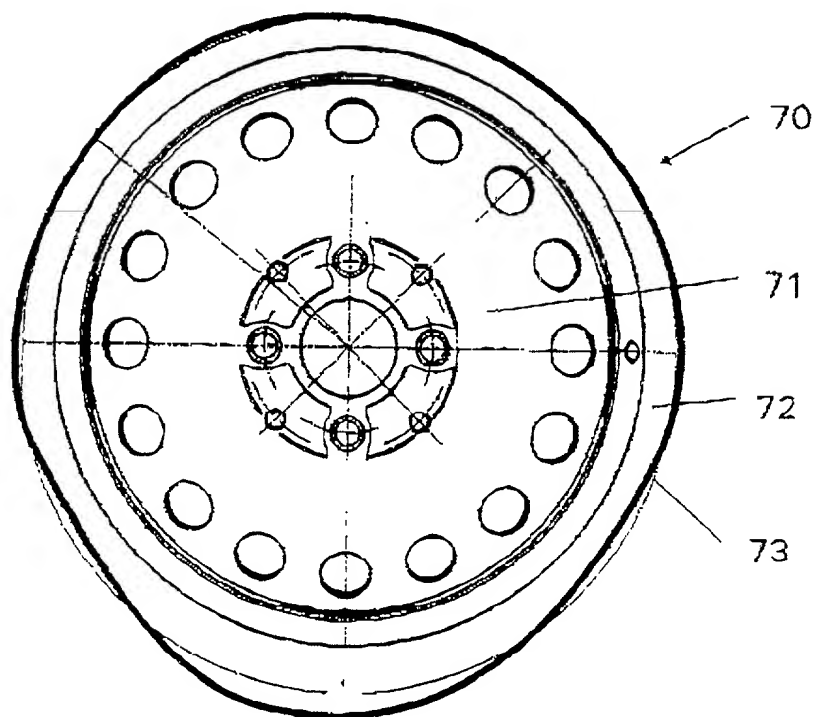



Fig. 13

11/11

HEIGHT OF RIM FLANGE (INTERIOR SIDE OF VEHICLE)

3
2.5
2
1.5
1
0.5
0
-0.5
-1
-1.5
-2

Fig. 14

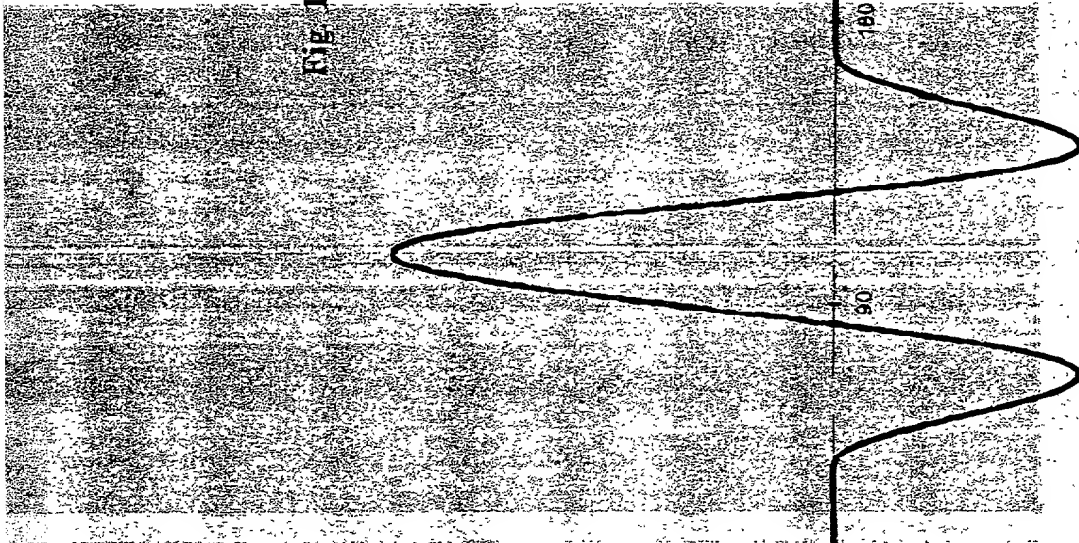

WHEEL AZIMUTH (DEGREES)

360

270

180

90

0